

.....FASTENING WHEELS IN THE AUTOMOTIVE WORLD...

## PCD VARIATION Nuts & Bolts - Hub Studs



### IMPORTANT

MAXIMUM GUARANTEED PCD VARIATION ON RADIUS: 1.2mm

**ATTENTION: Minimum thread engagement 12mm**



DIMENSIONS OF PCD VARIATION NUTS HEX 19						
CODE	THREAD	THREAD DEPTH	D	E	F	G
DV6LE	M12x1,5	26	19	4	26	34
DV2LE	M12x1,25	26	19	4	26	34
DV10LE	1/2 UNF	26	19	4	26	34

### Spline wheel stud

### Hub stud



**Please enquire for other sizes**

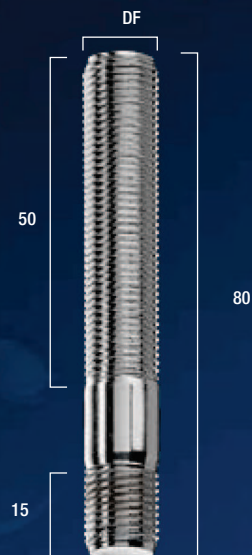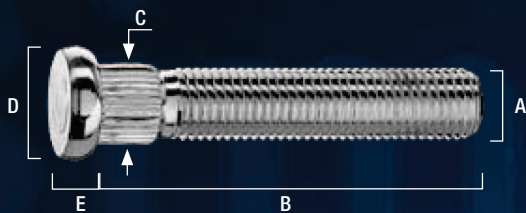

VEHICLE	PART #	A	B	C	D	E
Toyota - Mazda - Hyundai-Mitsubishi	CRP143A42	12x1,5	42	14,3	18	5
Toyota - Mazda - Hyundai-Mitsubishi	CRP143A62	12x1,5	62	14,3	18	5
Honda	CRP124A52	12x1,5	52	12,4	18	5
Honda	CRP124A62	12x1,5	62	12,4	18	5
Ford - Daewoo	CRP130A40	12x1,5	40	13,0	18	5
Ford - Daewoo	CRP130A55	12x1,5	55	13,0	18	5
Ford - Daewoo	CRP130A65	12x1,5	65	13,0	18	5
Subaru - Suzuki - Kia	CRP143B40	12x1,25	40	14,3	18	5
Subaru - Suzuki - Kia	CRP143B62	12x1,25	62	14,3	18	5
Offroads	CRP157E46D20	1/2 UNF	46	15,7	20	5

DF	PART #
M12X1,5	PRA80
M12X1,25	PRB80
M14X1,5	PRD80